

Form to complete and return by mail to contact@palamatic.fr

To make sure your data is taken into account, please save the document on your desktop before filling it in.

Company	<input type="text"/>	Date	<input type="text"/>
Contact name	<input type="text"/>	Project ref.	<input type="text"/>
Function	<input type="text"/>	Phone	<input type="text"/>
Address	<input type="text"/>	E-mail	<input type="text"/>
City	<input type="text"/>		
Country	<input type="text"/>		

Sector of activity

Food & Feed	<input type="checkbox"/>	Chemical industry	<input type="checkbox"/>	Fine chemical industry	<input type="checkbox"/>
Building industry	<input type="checkbox"/>	Water treatment	<input type="checkbox"/>	Other	<input type="text"/>



PROCESS REQUIREMENTS - IF POSSIBLE, SEND US A SKETCH OF THE REQUIRED INSTALLATION

System implementation Indoor Outdoor

Operating temperature -20°/+40° Other

Height available in mm.

Required flow rate in t./h.

Number of sacks /h. Operating time - h./week

Atex yes* no Temperature

Zone 20 21 22 0 1 2

**If Atex zone, please send the corresponding questionnaire.*

MANUFACTURING

Parts in contact with the product Mild steel AISI 304L AISI 316L Other

Other parts Mild steel AISI 304L AISI 316L Other

ADDITIONAL INFORMATION

SACK TECHNICAL CHARACTERISTICS

	Product 1	Product 2	Product 3	Product 4
Type of sacks				
Dimensions in mm				
Weight in kg				
Type of opening				
Glued	yes no <input type="checkbox"/>	yes <input type="checkbox"/> no	yes no	yes no
Stitched	yes no <input type="checkbox"/>	yes <input type="checkbox"/> no	yes no	yes no
Inner liner	yes no <input type="checkbox"/>	yes <input type="checkbox"/> no	yes no	yes no

Note: This data is important data for the validation of the adapted system. If possible, send us photos of the sacks.

PRODUCTS CHARACTERISTICS

	Product 1	Product 2	Product 3	Product 4
Designation				
Apparent density kg/m ³				
True density kg/m ³				
Maximum granulometry µm				
Main granulometry µm				
Angle of repose °				
Moisture content %				
Product temperature °C				
Abrasive	yes no <input type="checkbox"/>	yes <input type="checkbox"/> no	yes <input type="checkbox"/> no	yes no <input type="checkbox"/>
Toxic	yes no <input type="checkbox"/>	yes <input type="checkbox"/> no	yes no	yes no
Arching	yes no <input type="checkbox"/>	yes <input type="checkbox"/> no	yes no	yes no
Sticky	yes no <input type="checkbox"/>	yes <input type="checkbox"/> no	yes <input type="checkbox"/> no	yes no
Food product	yes no <input type="checkbox"/>	yes no	yes <input type="checkbox"/> no	yes no
Special characteristics*	yes no <input type="checkbox"/>	yes no	yes <input type="checkbox"/> no <input type="checkbox"/>	yes no
Free flowing product	yes no	yes no	yes no	yes no
Lumpy products**	yes no	yes no	yes no	yes no
Caked product	yes no	yes no	yes no	yes no

* If yes, please forward us the Material Safety Data Sheet.

**If the product presents lumps, please define the type of lumps

Note: The standard machines are able to pass 80 mm lump with a sieve of 100 x 100 mm 2/3.

It is very important to give us the maximum information on the products to be treated ; please send us the MSDS or inform us of the danger level/ toxicity of the product.


EXAMPLES OF IMPLEMENTATION

Dedusting yes no

Tube lifter yes no

Connection to dedusting device yes no

If yes, height available in mm

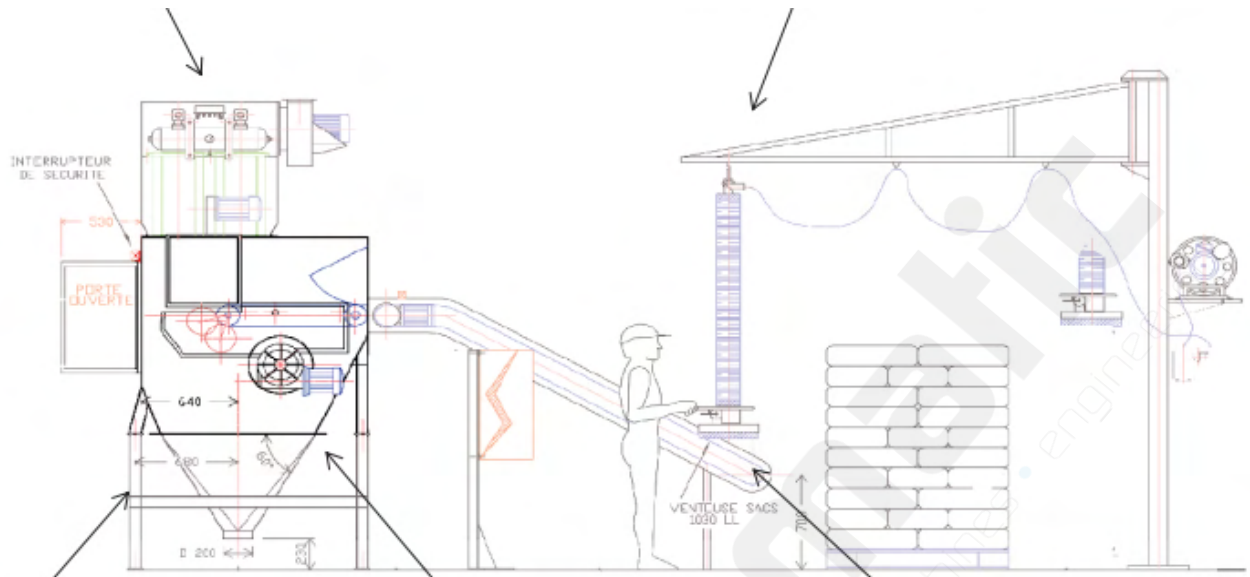

Support frame

Inclined conveyor

yes

Vibrating sifter

yes

no

yes

no

Height in mm

no

Mesh size in mm

Connected equipment (container, pneumatic conveying...)

Operator platform

yes

Height in mm

no

